
MPS-1, High-Speed Multi Plate Shaker



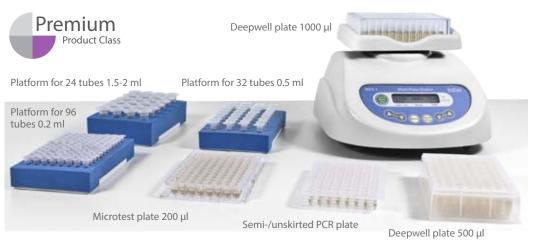

High–Speed Multi Plate Shaker **MPS-1** can be used in virtually any application by providing adjustable mixing of reagents in microtest plates, PCR plates, deepwell plates and test tubes (shaking tubes 0.2 to 2 ml and vortexing any volume up to 50 ml).

The shaker is compact and user–friendly. The shaker is ideal for personal use.

MPS-1 features a head for vortexing a single tube.

The unit is designed for operation in cold rooms, incubators (excluding CO_2 incubators) and closed laboratory rooms at ambient temperature from $+4^{\circ}C$ to $+40^{\circ}C$ in a non-condensing atmosphere and maximum relative humidity 80% for temperatures up to 31°C decreasing linearly to 50% relative humidity at 40°C. Low voltage external power supply (12 V) provides electrical safety in humid environment.

MPS-1 features Pulse Mode mixing function that works on the principle of giving a periodic impulse: the tube is accelerated to the set speed, holds it for 3 seconds and then drops the speed to zero. This motion is repeated until the timer runs out. This method provides a constant state of resuspension of the particles inside a tube, as the acceleration is always changing. The advantage of this method is the high throughput of mixed samples compared to vortexing a single tube.

Speed control range 300–3,200 rpm

 γ • Stable mixing with 3 mm orbit

Five mixing presets

· Pulse Mode mixing function

• Quiet operation — low noise at maximum speed

- Universal platform holder for Deepwell plates and Microtest plates
- Additional 4 platforms for semiskirted and unskirted PCR plates 200 μ l as well as for tubes from 0.2 to 2 ml





Australian distributors: Fisher Biotec Australia free call: 1800 066 077 email: info@fisherbiotec.com web: www.fisherbiotec.com



MPS-1, High-Speed Multi Plate Shaker

Vortexing a 50 ml tube



| | Mixing Speed control range | 300–3,200 rpm |
|--|--|---------------|
| | Platform options: | |
| | For semi-\unskirted PCR plate or 96 microtest tubes 0.2 ml | P-02/96 |
| | – For 24 microtest tubes 1.5-2 ml | P-2/24 |
| | – For 32 microtest tubes 0.5 ml | P-05/32 |
| | - For 24 microtest tubes 0.5 ml and 48 microtest tubes 0.2 ml | P-02/05 |

– Universal platform for deepwell plates, 96-well microtest plates (U, V or flat bottomed), 384-well microtest plates

Types of mixing presets:

| VORTEX | 3,200 rpm |
|--------|----------------|
| HARD | 2,600 rpm |
| MEDIUM | 1,800 rpm |
| SOFT | 1,000 rpm |
| CUSTOM | adjustable rpm |

Vortexing a 15 ml tube



| Features a Pulse Mode mixing function | n |
|--|---|
| Features a Vortex function | |
| Maximum load | 0.3 kg |
| Mixing Orbit | 3 mm |
| Acceleration time to maximum speed | 5 sec |
| Digital time setting | 0-60 min (15 sec increment)/ non-stop |
| Maximum continuous operation time | 8 hrs |
| Noise level, not more | 65 dB |
| Weight | 5.1 kg |
| Overall dimensions (W \times D \times H) | 225 × 215 × 150 mm |
| Input current/power consumption | 12 V, 800 mA / 10 W |
| External power supply | Input AC 100-240 V 50/60 Hz; Output DC 12 V |

Deepwell plate 96/1000 μl Microtest plate 200 µl

Deepwell plate 96/500 µl

APPLICATIONS OF UNIVERSAL BUILT-IN **PLATFORM**







ORDERING INFORMATION:

Cat. number MPS-1, Multi Plate Shaker with built-in universal platform BS-010216-A03 MPS-1, Multi Plate Shaker with built-in universal platform and set of 4 platforms (P-02/96, P-2/24, P-05/32, P-02/05) BS-010216-A11

| Optional platforms: | | Cat. number |
|---------------------|---|--------------|
| 1 P-02/96 | For semi-/unskirted PCR plate or 96 microtest tubes 0.2 ml | BS-010216-CK |
| 2 P-2/24 | For 24 microtest tubes 1.5-2 ml | BS-010216-AK |
| 3 P-05/32 | For 32 microtest tubes 0.5 ml | BS-010216-BK |
| 4 P-02/05 | For 24 microtest tubes 0.5 ml and 48 microtest tubes 0.2 ml | BS-010216-DK |







4 Platform P-02/05







