

GP

Series



*A new contender in the industrial
balance field*




A&D ...Clearly a Better Value
A&D Company, Limited



Australian distributors:
Fisher Biotec Australia
free call: 1800 066 077
email: info@fisherbiotec.com
web: www.fisherbiotec.com

The World's Most

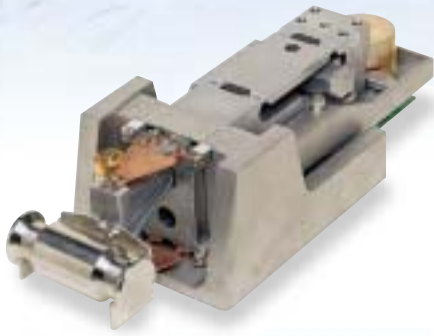

The GP Series incorporates our enhanced weighing sensor, Double Leveraged Super Hybrid Sensor (SHS).

Building on the basic SHS features of fast and stabilization, our enhanced SHS technology brings the most accurate weighing results to the industrial balances in 12kg to 101kg capacities class.



Internal Calibration

The GP internal calibration with an internal mass saves time and money. External calibration requires a great deal of skill, time and an expensive external mass. With our internal calibration with internal mass, the balance is calibrated very quickly.

- Automatic Self Calibration – Self-calibrates automatically when the balance detects ambient temperature changes
- One Touch Automatic Calibration – Allows you to calibrate the balance on demand with just the push of a button.
- Calibration is essential for accuracy in weighing. For example, in high resolution balances, changes in sensitivity drift can be caused by changes in the ambient temperature. Take the GP-30K for example, the weight might change by 0.9g with a change of 10 °C. (Sample's weight: 30kg)
- Thanks to our Double Leveraged Super Hybrid Sensor, the GP's motor-driven internal calibration mass is equivalent to a 50kg calibration mass in terms of top loading capacity on the weighing pan. The adjusted weighing accuracy is within ± 15 digits in relation to the weighing capacity while conforming to the OIML's Class II balances definitions after using GP's internal calibration mass.

Standard WinCT

WinCT (Windows Communication Tools Software), provides easy transmission of weighing data from A&D balances to a computer using the RS-232C interface. Quickly exports data into Windows applications in a manageable format limited only by the computer's capabilities.

RS-232C Interface

Using a USB/RS-232C Converter, you can transfer data between a USB equipped PC and a GP balance. This also makes your GP balance hot-swappable-no need to turn the balance and computer off before disconnecting the balance.

Most User-Friendly Industrial



GP-S

with detached display unit

GP-30KS — (31kg/0.1g)

GP-100KS — (101kg/1g)

GP Series

with Swing Arm display type



Super Hybrid Sensor



Vacuum Fluorescent



Full Digital Calibration



Complies with GLP/GMP format



RS-232C Serial Interface



IP-65 resistant to water & dust



HI/OK/LO Comparator



Automatic Counting Accuracy Improvement



Windows Communication Tools Software



Display Auto Power OFF



Internal Calibration



Detachable Display Unit

* SmartRange

The GP-32K and GP-102K have the precision and standard ranges. The precision range has a higher resolution and the standard one is normal resolution. Pressing the RE-ZERO key allows weighing in the precision range, regardless to the tare value. (**SmartRange** function). **SmartRange** function enables you to weigh or add samples in the precision range without removing container and/or those objects that have been placed on the pan.

Industrial Balances...

Swing Arm Display

Compliant IP-65 **IP65**
(resistant to dust, water and moisture)



Clear & Large VFD Display

888 VFD Display Easy to see - even in the dark / Wide angle view prevents mistakes



ANIMAL



Animal Weighing Mode allows you to quickly and accurately determine the weight of any live or unstable subject. Optional animal weighing pan (GP-12) is available.

ACA



Automatic Counting Accuracy Improvement (ACA) is a novel and useful approach to ensuring the utmost in performance when counting even the smallest of items. ACA automatically updates and refines the average piece weight used to determine the total quantity.



Automatic Adjustable Environment Setting Adapts to the most suitable Environment Response Setting automatically with one-touch key operation. The response annunciator displays "FAST", "MID" and "SLOW."

Manual Response Adjustment can be set by pressing the MODE key and response speed can be adjusted to FAST, MID or SLOW.



Percentage Function facilitates an effective and quick comparison of a sample or commodity against a known reference mass. Simply place an object on the pan to register its weight as 100%. Place another object on the pan to compare its weight in percentage mode.

COMPARATOR



Standard Comparator Function offers increased flexibility and compatibility for a vast number of applications. You can input a target weight and weigh heavier or lighter items using either the keyboard or by placing samples on the pan. Hi, OK or Lo will be indicated on the display to show the comparison results.



Overall Capacity Indication is a unique and helpful feature. By indicating how much of the balance's capacity has been filled, the risk of overloading the balance is minimized.

IP65 IP-65 Splash Proof Keyboard, Display and Base Units

Balances protected from dust and spills up to IP65 level

GLP GLP/GMP/ISO Compliance

Allows GLP, GMP and ISO balance management by outputting the Balance ID number and data used to calibrate the balance. The data can be output to A&D's AD-8121B printer or a PC, indicating date, time, Balance ID number, serial number and calibration data.



Standard RS-232C

Bi-directional communication with a PC or connect directly to a printer

Commands

A PC can control the balance by sending commands to the balance.

- Command to query weighing data
- Command to control the balance
- Command to control the memory function
- Command to control the comparator function

ID Number

The balance ID number can be set. It is used to identify the balance when GLP is used. The ID number is memorized and maintained once it is fixed, even if the AC adaptor is removed.

Optional Underhook

Ideal for density determination and weighing magnetic substances

- GP-20 Underhook for GP-12K/20K/32K/30K/40K/30KS
- GP-21 Underhook for GP-60K/100K/102K/100KS

Density Determination of a Solid Object

The GP has a density determination mode, which is available after changing the internal parameter settings.

Once the object's weight in the air, in liquid and the liquid density are input, the solid density will be calculated.

It is useful to determine concrete's density.

Enlargement Indication of HI, OK, LO Symbols

With MODE key pressed during usual HI, OK or LO indication, the display is refreshed from $3.0000\text{kg}^{\text{HI}}$ to HI kg . The letters (HI, for example), can be enlarged.

Accumulation of Weighing Results

GP can accumulate the weighing results and display and output them.

Data Memory

Format the data memory function for:

- 200 sets of weighing data
- 100 sets of weighing data with Time & Date
- 20 sets of Tare values
- 50 sets of GLP data-Time & Date, Calibration Data, ID Number and Serial number
- 50 sets of Unit Weight for Counting mode
- 20 sets of comparator Upper & Lower Limits

Time & Date

Standard Time & Date Function complies with GLP and Interval Weighing in the Data Memory function.

Auto Self Checking

Automatically checks itself when setting the Automatic Adjustment Environment.

Interval Time Setting

Weighing intervals of 2, 5, 10, 30 seconds and 1, 2, 5, 10 minutes in the Data Memory Function.

Auto Re-Zero

Re-Zeros automatically after data output

Large Stainless Steel Weighing Pan

384mm x 344mm for GP-12K/20K/32K/30K/30KS/40K/60K
386mm x 346mm for GP-100K/100KS/102K

Multiple Weighing Units & Programmable Unit

Uses programmable or standard units of measure (g, kg, lb, OZ, ct, dwt, OZt, mom, TL, MS, tola and DS)

Air Bubble Leveling

Easily check the balance for level installation

SmartRange

For more accurate weighing, SmartRange function is provided on the GP32K (6.1kg x 0.1g/31kg x 1g) and GP-102K (61kg x 1g/101kg x 10g).

Built-In Internal Calibration Mass

The GP has a built-in internal calibration mass.

Internal calibration mass is equivalent to a 50kg calibration mass in terms of top loading capacity on the weighing pan.

Display Auto Power OFF

Display turns off after 10 minutes of inactivity, which can be disabled when not needed.

Auto Power ON

Plug it in and it turns ON without pressing the ON/OFF key.



GP Series

Industrial Precision Balances

NMI Trade Approval
NMI #6/4C/220

SmartRange **Animal Weighing** **SHS** Super Hybrid Sensor

Comparator Function **GLP** GLP Compliant **Internal Calibration**

VFD Display **Software** **AAAI** Counting with ACAI

Accumulation Function **RS-232C Interface** **Percentage Function**

IP65



- Easy data capture with free WINCT software
- Australia's #1 Geo-test balance!
- Swing arm design or separate display design
- IP65 protected
- Easy calibration with internal calibration mass
- SHS response speed of only 1.5 seconds
 - GLP, GMP and ISO compliant
 - Large Vacuum Fluorescent Display
 - Data memory function
 - Counting function with ACAI (Automatic Counting Accuracy Improvement)
- Smart range (GP-32K/102K)
- Comparator function
- Underhook weighing for thermal and magnetic samples as well as for density calculation

Option

Underhook **Buzzer**



Specifications	GP-12KA	GP-20KA	GP-30KA	GP-32KA	GP-30KS ■	GP-32KS ■
Part Number	06072001	06072002	06072004	06072008	06072010	06072011
Part Number	06072001-TA	06072002-TA	06072004-TA	06072008-TA	06072010-TA	06072011-TA
Calibration	Internal & External	Internal & External	Internal & External	Internal & External	Internal & External	Internal & External
Capacity	12kg	21kg	31kg	6kg/31kg	31kg	6kg/31kg
Resolution	0.1g	0.1g	0.1g	0.1/1g	0.1g	0.1/1g
NMI Resolution	1g	1g	1g	1g	1g	1g
Dimensions	372(W) x 615(D) x 130(H) mm					
Pan Size	384mm x 344mm			386mm x 346mm		
Power Supply	AC Adaptor TB-301 (included)					

NMI Versions also require trade verification - fees apply
■ ex Japan

Specifications	GP-40KA	GP-61KA	GP-60KS ■	GP-61KS ■	GP-100KA ■	GP-102KA ■
Part Number	06072005	06072009	06072012	06072013	06072006	06072007
Part Number	N/A	N/A	06072012-TA	N/A	06072006-TA	06072007-TA
Calibration	Internal & External	Internal & External	Internal & External	Internal & External	Internal & External	Internal & External
Capacity	41kg	61kg	61kg	61kg	101kg	61kg/101kg
Resolution	0.5g	0.1g	1g	0.1g	1g	1g / 10g
NMI Resolution	N/A	N/A	10g	N/A	10g	10g / 100g
Dimensions	373(W) x 615(D) x 130(H) mm					
Pan Size	384mm x 344mm		386mm x 346mm			
Power Supply	AC Adaptor TB-301 (included)					

NMI Versions also require trade verification - fees apply
■ ex Japan

Accessories	Part Number
Serial Cable DB25 Male to DB9 Female	03000001
GP OP-04 Comparator Output/RS232C	06072104
GP OP-06 Analog / Current Loop Output ■	06052505
GP OP-20 Underhook (for GP12K/20K/32K/30K/40K)	06072120
GP OP-21 Underhook (for GP60K/100K/100KS/102K)	06072121
Plastic Cover for GP Display (Pack of 5)	10-73004753

■ ex Japan