



ECM™ 630

Exponential Decay Wave Electroporation System



The ECM™ 630 offers full flexibility in selection of exponential decay wave voltage, resistance, and capacitance values. This flexibility is the key to achieving the optimal time constants and field strengths needed for efficient transformation of prokaryotes and transfection of eukaryotes. This system is an outstanding value for researchers working with bacteria, yeast, stem cell transfection, plant transformation and insect transfection.

Multi-Well Electroporation

Transitioning from standard cuvette work in a safety dome or safety stand to multi-well electroporation is quick and simple with the addition of a high throughput (HT) plate handler and multi-well plates. High throughput electroporation permits large numbers of samples to be quickly processed. Electroporation conditions are more easily optimized, providing the highest possible efficiency.

Monitoring Option

The addition of Enhancer 3000 allows the researcher to monitor and track key electrical parameters used in electroporation applications. The electrical pulse data is captured as both a graphic display of the waveform and electrical output values following each experiment. This data can be stored on a memory stick or downloaded to a computer easily by using the USB port for potential analysis, documentation and validation purposes. For more information, please visit www.btxonline.com.

Applications

- Transformation of bacteria and yeast
- Transfection of mammalian cells
- Transfection of plant cells and plant protoplasts
- High throughput electroporation in 25- and 96-well formats

Features

- Wide and accurate exponential decay voltage, internal resistance, and capacitance ranges
- Preset protocols — including most common bacteria and microorganism cell types, as well as CRISPR applications
- User-defined protocols — unlimited ability to add and modify protocols
- Safety — displays sample resistance measurements for each pulse with three layers of arc protection
- Data management — stores logs of every pulse delivered for QC and troubleshooting
- Ease of use — touch screen operation

The ECM™ 630 is intended For Research Use Only. Not for use in




Australian distributors:
Fisher Biotec Australia
free call: 1800 066 077
email: info@fisherbiotec.com
web: www.fisherbiotec.com



BTX[®]

a division of Harvard Bioscience, Inc.

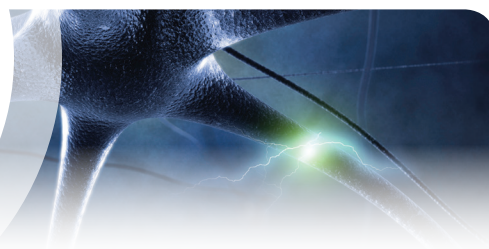

ECM™ 630 Specifications

| | |
|------------------------------|------------------------------------------------------------------|
| Operational Status | Internal self-test upon start-up |
| Interface | 7 inch color touchscreen |
| Input | 100 to 240 VAC |
| Charge Time | LV <7 s, HV <4 s |
| Arc Control | Yes |
| Voltage Range | |
| LV Mode | 5 to 500 V in 1 V steps |
| HV Mode | 505 to 3,000 V in 5 V steps |
| Capacitance | |
| LV Mode | 25 to 3275 µF in 25 µF steps |
| HV Mode | 10, 25, 35, 50, 60, 75, 85 µF |
| Internal Resistance | |
| LV Mode | 25 to 1,575 Ω in 25 Ω steps |
| HV Mode | 50 to 1,575 Ω in 25 Ω steps |
| Maximum Time Constant | 5 s at 500 V peak or 133 ms at 3,000 V peak |
| Programmability | Storage over 1,000 Protocols |
| Safety | Pre-Pulse Sample Resistance Check, Pulse Over-Current Protection |

Ordering Information

| Order No. | Description |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 45-2051 | ECM 630 Electroporation System with Safety Dome Includes: ECM 630 Generator, Safety Dome, Cuvettes 1 mm, 2 mm, 4 mm pkg. of 30 (10 each), and Cuvette Rack 660 |
| 45-0651 | ECM 630 Electroporation System with Safety Stand Includes: ECM 630 Generator, 630B Safety Stand, Cuvettes 1 mm, 2 mm, 4 mm pkg. of 30 (10 each) and Cuvette Rack 660 |
| 45-0652 | ECM 630 Generator only |
| 45-0655 | ECM 630 System with Monitoring Includes: ECM 630 Generator, 630 B Safety Stand, Cuvettes 1 mm, 2 mm, 4 mm, pkg of 30 (10 each), Cuvette rack 660, Enhancer 3000 probe, Enhancer interface box, Oscilloscope and cables |
| 45-0653 | ECM 630 High Throughput System, 25-well with HT-100 Includes: ECM 630 Generator, 25-Well Plates (2 mm gap, 6X), Plate Seals, HT-100 Plate Handler and a plate adaptor |
| 45-0654 | ECM 630 High Throughput System, 96-well with HT-100 Includes: ECM 630 Generator, 96-Well Plates (2 mm gap, 2X), Plate Seals, HT-100 Plate Handler and a plate adaptor |
| 45-0656 | ECM 630 High Throughput System with Monitoring Includes: ECM 630 Generator, 630B Safety Stand, Cuvettes 1 mm, 2 mm, 4 mm pkg. of 30 (10 each), Cuvette Rack 660, Enhancer 3000 Probe, Enhancer Interface Box, Oscilloscope, Cables, 25-Well Plates (2 mm gap, 6X), HT-200 Plate Handler and a plate adaptor |



Australian distributors:
Fisher Biotec Australia
free call: 1800 066 077
email: info@fisherbiotec.com
web: www.fisherbiotec.com